wineo
THAT'S FLOORING

PERFECT FIT
ACCESSORIES

THE PERFECT FIT.

THAT'S FLOORING

CONTENT

Underlay material	**04**
Skirting boards	**14**
Profiles	**26**
Stair nosing	**30**
Skirting boards **External corners | Inside corners** **Weld rods**	**34**
Flash Coving | Feature strips	**36**
Installation **Cleaning & Repair**	**38**

Printing errors and product-related
technical modifications reserved.
Art. no. 20091021

UNDERLAY MATERIAL PRODUCT FINDER
FOR PURLINE ORGANIC FLOORING OR DESIGN FLOORING

Installation of	Installation type	Installation	Special feature	Product
wineo PURLINE Organic Flooring or Design Flooring and comparable design floors for gluing and clicking in	for gluing	floating	up to use class 23/32	**silentPREMIUM**
			up to use class 23/33	**silentPREMIUM CONTRACT**
		glued	bup to use class 23/33	**silentPLUS**
	for clicking in	floating	for elastic click-floors	**silentCOMFORT**
			Rigid-click < 4 mm	**silentRIGID COMPACT**
			(Semi-) Rigid-click	**silentRIGID**

+5 YEARS GUARANTEE

If a wineo PERFECT FIT PU underlay (soundPROTECT, soundSTOP, silentCOMFORT, silentPREMIUM, silentPLUS or silentRIGID) is used in combination with a suitable wineo flooring product, the wineo guarantee will be extended by 5 years.

UNDERLAY MATERIAL PRODUCT FINDER
FOR LAMINATE FLOORING AND PARQUET FLOORING

Installation of	Anforderung	Substrate	Product
Laminate flooring or parquet flooring	Underfloor heating	mineral based	**soundPROTECT PROFI SD**
			soundPROTECT SD
			soundSTOP
			noisePROTECT SD
		non-mineral based	**soundPROTECT PROFI**
			soundPROTECT
			soundSTOP
			noisePROTECT
	Heat insulation	mineral based	**noiseREDUCT SD**
		non-mineral based	**noiseREDUCT**
		mineral based	**insulationBOARD + PE-Dampfbremse**
		non-mineral based	**insulationBOARD**

PU UNDERLAYS
FOR PURLINE ORGANIC FLOORING
& DESIGN FLOORING

Made with ecuran your flooring upgrade

cradle to cradle CERTIFIED SILVER

www.blauer-engel.de/uz156

silentPREMIUM | Art. no. UPU1010

RECOMMENDED USE
RESIDENTIAL

THE PREMIUM CLASS
FOR THE FLOATING INSTALLATION
OF ELASTIC FLOOR COVERINGS FOR GLUING

- floating installation of plank material
- self-adhesive top surface, floating installation, ultra-fast
- perfect solution for underfloor heating
- up to utilisation class 23/32

Fits perfectly for PURLINE organic flooring & design flooring for gluing: wineo 400 l 600 l 1000
and all comparable elastic dryback floor coverings

silentPREMIUM is an underlay **with a self-adhesive top surface**. The underlay is **rolled out** in a **floating** arrangement, i.e. loose on the screed. Once the protective film has been removed, the flooring can be stuck on top. Working without adhesive is extremely clean and installation is **very quick**.

Technical characteristics	
Base material:	*ecuran* (bio-polyurethane)
Rolls / pallets:	40
Roll:	6.5 m²
Thickness:	1.8 mm
Width:	1 m
Length:	6.5 m
Weight:	2.6 kg / m²
Impact sound reduction:	~ 15 dB
Thermal resistance:	0.01 (m²K) / W

silentPREMIUM CONTRACT | Art.-Nr. UPU1040

NEW

RECOMMENDED USE
COMMERCIAL SECTOR

THE PREMIUM CLASS
FOR THE FLOATING INSTALLATION OF ELASTIC FLOOR COVERINGS FOR GLUING IN COMMERCIAL SPACES

- floating installation of plank and roll material
- self-adhesive top surface, floating installation, ultra-fast
- perfect solution for underfloor heating
- up to utilisation class 23/33

Fits perfectly for PURLINE organic flooring & design flooring for gluing: wineo 800 l 1200 | 1500
and all comparable elastic plank and roll material

With **silentPREMIUM CONTRACT** this is the first time **that sheet materials can be laid floating**. The mat is rolled out separately onto the screeding. After removing the protective film, materials are laid floating on the area **in plank or roll form**. The inner glass fleece carrier provides significant stability, so that the laid product cannot slip. The processing without glue is extremely clean and **very quick.**

Technical characteristics	
Base material:	*ecuran* (bio-polyurethane)
Rolls / pallets:	40
Roll:	6.5 m²
Thickness:	1.8 mm
Width:	1 m
Length:	6.5 m
Weight:	2.6 kg / m²
Impact sound reduction:	~ 15 dB
Thermal resistance:	0.01 (m²K) / W

PU UNDERLAYS
FOR PURLINE ORGANIC FLOORING
OR DESIGN FLOORING

Made with ecuran your flooring upgrade

www.blauer-engel.de/uz156

silentPLUS | Art. no. UPU1020

THE PLUS IN QUIETNESS
FOR FULL-SURFACE BONDING
OF ELASTIC FLOOR COVERINGS FOR GLUING

- self-adhesive below, full-surface bonding above, ultra-quiet
- perfect solution for underfloor heating
- up to utilisation class 23/33

Fits perfectly for PURLINE organic flooring & design flooring for gluing: wineo 400 l 600 l 800 | 1000 | 1500 and all comparable elastic dryback fl oor coverings

silentPLUS is an underlay with a **self-adhesive lower surface**. Once the protective film has been removed, the underlay is stuck to the substrate. The flooring is then fitted with an additional adhesive on the entire upper surface. This double adhesive method reduces impact noise up to 17 dB and guarantees that special bonus of very low noise.

Technical characteristics	
Base material:	*ecuran* (bio-polyurethane)
Rolls / pallets:	40
Roll:	8 m²
Thickness:	2 mm
Width:	1 m
Length:	8 m
Weight:	2 kg / m²
Impact sound reduction:	~ 17 dB
Thermal resistance:	0.01 (m²K) / W

silentCOMFORT | Art. no. UCT1000

THE CONVENIENT MAT
FOR STABLE CLICKING INSTALLATION
OF ELASTIC FLOOR COVERINGS

- adhesive top surface, floating installation, ultra-stable
- perfect solution for underfloor heating

Fits perfectly for PURLINE organic flooring & design flooring for clicking in: wineo 400 l 600 l 800 l 1000 and all comparable elastic dryback floor coverings

silentCOMFORT is the best choice **for floating installation of click flooring**. The **adhesive surface** ensures the click connections of the flooring are stable so that the flooring does not slip on the underlay. silentCOMFORT is therefore the most stable underlay for comfortable click installation of elastic flooring.

Technical characteristics	
Base material:	*ecuran* (bio-polyurethane)
Rolls / pallets:	40
Roll:	10 m²
Thickness:	1.5 mm
Width:	1 m
Length:	10 m
Weight:	1.5 kg / m²
Impact sound reduction:	~ 16 dB
Thermal resistance:	0.01 (m²K) / W

PU UNDERLAYS
FOR PURLINE ORGANIC FLOORING
OR DESIGN FLOORING

Made with ecuran your flooring upgrade

www.blauer-engel.de/uz156

silentRIGID COMPACT | Art. no. UPU1050

NEW

RECOMMENDED USE
FOR THIN RIGID COVERINGS
WITH LESS THAN 4 MM
PRODUCT THICKNESS

THE MUST-HAVE
FOR THE INSTALLATION
OF RIGID-FLOORS FOR CLICKING IN

- no breaking of the click connection
- super stabilising
- laid as a floating floor

Fits perfectly for thin rigid design flooring for clicking in:
with less than 4 mm product thickness

The **silentRIGID COMPACT** is the **perfect underlay** for **rigid floors with less than 4 mm product thickness**. With these types of products it stabilises click connections which are often weak and reduces walking noise.

Technical characteristics	
Base material:	*ecuran* (bio-polyurethane)
Rolls / pallets:	54
Roll:	10 m²
Thickness:	1.0 mm
Width:	1 m
Length:	10 m
Weight:	1.2 kg / m²
Impact sound reduction:	~ 12 dB
Thermal resistance:	0.01 (m²K) / W

silentRIGID | Art. no. UPU1030

RECOMMENDED USE
FOR RIGID COVERINGS

THE MUST-HAVE
FOR THE INSTALLATION
OF RIGID-FLOORS FOR CLICKING IN

- no breaking of the click connection
- super stabilising
- laid as a floating floor

Fits perfectly for (semi-) rigid design flooring for clicking in: wineo 600 l 1200 and any comparable rigid design flooring

The **silentRIGID** was specially developed for **rigid floors in the premium sector**. With these types of products it stabilises click connections which are often weak and reduces walking noise.

Technical characteristics	
Base material:	*ecuran* (bio-polyurethane)
Rolls / pallets:	54
Roll:	9 m²
Thickness::	1.2 mm
Width:	1 m
Length:	9 m
Weight:	1.5 kg / m²
Impact sound reduction:	~ 13 dB
Thermal resistance:	0.01 (m²K) / W

PU UNDERLAYS
FOR LAMINATE FLOORING

Made with ecuran your flooring upgrade

www.blauer-engel.de/uz156

soundPROTECT | Art. no. UPU200

THE ALL-ROUNDER
WITH LONG-LIFE PERFORMANCE
2 mm

- ultra-quiet, efficient, for a stable click connection
- perfect solution for underfloor heating, suitable for non-mineral subsurfaces (a vapour barrier must be used with mineral subsurfaces)

Fits perfectly for laminate flooring:
wineo 300 | 500 | 550 and all comparable standard laminate and parquet products

soundPROTECT is the perfect **2 mm underlay for laminate and parquet flooring**. It ensures maximum reduction in impact and reflected walking sound levels, stable retention of the click connection, and is extremely durable.

Technical characteristics	
Base material:	*ecuran* (bio-polyurethane)
Rolls / pallets:	40
Roll:	8 m²
Thickness:	2 mm
Width:	1 m
Length:	8 m
Weight:	1.7 kg / m²
Impact sound reduction:	**~ 19 dB**
Reflected walking sound:	**~ 28 %**
Thermal resistance:	0.01 (m²K) / W

BEST COMBI

soundPROTECT SD | Art. no. UPU200SD

With integrated VAPOUR BARRIER

THE ALL-ROUNDER
WITH LONG-LIFE PERFORMANCE
2 mm

- ultra-quiet, efficient, for a stable click connection
- suitable for mineral subsurfaces (such as screed) thanks to integrated vapour barrier
- perfect solution for underfloor heating

Fits perfectly for laminate flooring:
wineo 300 | 500 | 550 and all comparable standard laminate and parquet products

soundPROTECT SD is the perfect **2 mm underlay for laminate and parquet flooring with integrated vapour barrier**. It ensures maximum reduction in impact and reflected walking sound levels, stable retention of the click connection, and is extremely durable.

Technical characteristics	
Base material:	*ecuran* (bio-polyurethane)
Rolls / pallets:	40
Roll:	8 m²
Thickness:	2 mm
Width:	1 m
Length:	8 m
Weight:	1.7 kg / m²
Impact sound reduction:	**~ 19 dB**
Reflected walking sound:	**~ 28 %**
Thermal resistance:	0.01 (m²K) / W
SD value:	> 75 m

BEST COMBI

PU UNDERLAYS
FOR LAMINATE FLOORING

Made with ecuran your flooring upgrade

www.blauer-engel.de/uz156

soundPROTECT PROFI | Art. no. UPU100

THE ALL-ROUNDER FOR PROFESSIONALS
WITH LONG-LIFE PERFORMANCE
3 mm

- ultra-quiet, efficient, for a stable click connection
- perfect solution for underfloor heating, suitable for non-mineral subsurfaces (a vapour barrier must be used with mineral substrates)

Fits perfectly for laminate flooring:
wineo 300 | 500 | 550 and all comparable standard laminate and parquet products

soundPROTECT PROFI is the perfect **3 mm underlay for laminate and parquet flooring**. It ensures maximum reduction in impact and reflected walking sound levels, stable retention of the click connection, and is extremely durable.

Technical characteristics	
Base material:	*ecuran* (bio-polyurethane)
Rolls / pallets:	40
Roll:	5.5 m²
Thickness:	3 mm
Width:	1 m
Length:	5.5 m
Weight:	2.8 kg / m²
Impact sound reduction:	**~ 20 dB**
Reflected walking sound:	**~ 31 %**
Thermal resistance:	0.01 (m²K) / W

BEST COMBI

soundPROTECT PROFI SD | Art. no. UPU100SD

With integrated VAPOUR BARRIER

THE ALL-ROUNDER FOR PROFESSIONALS
WITH LONG-LIFE PERFORMANCE
3 mm

- ultra-quiet, efficient, for a stable click connection
- suitable for mineral subsurfaces (such as screed) thanks to integrated vapour barrier
- perfect solution for underfloor heating

Fits perfectly for laminate flooring:
wineo 300 | 500 | 550 and all comparable standard laminate and parquet products

soundPROTECT PROFI SD is the perfect **3 mm underlay for laminate and parquet flooring with integrated vapour barrier**. It ensures maximum reduction in impact and reflected walking sound levels, stable retention of the click connection, and is extremely durable.

Technical characteristics	
Base material:	*ecuran* (bio-polyurethane)
Rolls / pallets:	40
Roll:	5.5 m²
Thickness:	3 mm
Width:	1 m
Length:	5.5 m
Weight:	2.8 kg / m²
Impact sound reduction:	**~ 20 dB**
Reflected walking sound:	**~ 31 %**
Thermal resistance:	0.01 (m²K) / W
SD value:	> 75 m

BEST COMBI

PE UNDERLAYS
FOR LAMINATE FLOORING

Made with ecuran your flooring upgrade

CERTIFIED cradle to cradle SILVER

www.blauer-engel.de/uz156

soundSTOP | Art. no. UPU300

THE EXPERT
WITH EXTREME
SOUND-REDUCTION

- self-adhesive top layer, adhesive bottom layer, especially quiet
- efficient
- for stable click connections

Fits perfectly for laminate flooring:
wineo 500 and comparable laminate flooring with fold-down connection and triple-layer parquet

soundSTOP is a special underlay for laminate and parquet flooring and features a **self-adhesive top layer and adhesive bottom layer**. Impact and walking noise is therefore reduced to an excellent level.

Technical characteristics	
Base material:	*ecuran* (bio-polyurethane)
Rolls / pallets:	40
Roll:	8 m²
Thickness:	2 mm
Width:	1 m
Length:	8 m
Weight:	1.7 kg / m²
Impact sound reduction:	**~ 18 dB**
Reflected walking sound:	**~ 50 %**
Thermal resistance:	0.01 (m²K) / W

BEST COMBI

BEST INGREDIENTS FOR BEST RESULTS

The basis of wineo PU underlays is *ecuran*, the unique bio-polyurethane from Windmöller. *ecuran* is based on plant oils such as canola or castor oil and naturally occurring mineral components such as chalk.

Made with ecuran your flooring upgrade

PU underlays made of *ecuran*

- fast, energy-efficient distribution of ground heat
- excellent noise reduction with hard and soft floor coverings
- long-life performance of at least 30 years
- excellent residual indentation behaviour
- sustainable raw materials
- without the addition of chlorine, plasticisers or solvents

PE UNDERLAYS
FOR LAMINATE FLOORING

noisePROTECT | Art. no. UPE100

THE RELIABLE PROTECTION
FOR NOISE REDUCTION

- quiet, lightweight, for use with underfloor heating

Fits perfectly for laminate flooring:
wineo 300 and all comparable standard laminate and parquet products

noisePROTECT is the **entry level underlay for laminate and parquet flooring**. This underlay is **suitable for underfloor heating**, is easy to handle and has good impact and reflected walking sound reducing characteristics.

Technical characteristics	
Material:	Polyethylen (PE)
Rolls / carton:	6
Roll:	15 m²
Thickness:	2 mm
Width:	1 m
Length:	15 m
Weight:	0.2 kg / m²
Impact sound reduction:	~ 19 dB
Reflected walking sound:	20 %
Thermal resistance:	0.038 (m²K) / W

noisePROTECT SD | Art. no. UPE100SD

With integrated VAPOUR BARRIER

THE RELIABLE PROTECTION
FOR NOISE REDUCTION

- quiet, lightweight, for use with underfloor heating
- suitable for mineral subsurfaces (such as screed) thanks to integrated vapour barrier

Fits perfectly for laminate flooring:
wineo 300 and all comparable standard laminate and parquet products

noisePROTECT SD is the **entry level underlay for laminate and parquet flooring with integrated vapour barrier**. This underlay is **suitable for underfloor heating**, is easy to handle and has good impact and reflected walking sound reducing characteristics.

Technical characteristics	
Material:	Polyethylen (PE)
Rolls / pallets:	20
Roll:	15 m²
Thickness:	2.2 mm
Width:	1 m
Length:	15 m
Weight:	0.32 kg / m²
Impact sound reduction:	~ 19 dB
Reflected walking sound:	15 %
Thermal resistance:	0.038 (m²K) / W
SD value:	> 75 m

XPS UNDERLAYS
FOR LAMINATE FLOORING

noiseREDUCT | Art. no. UXPS100

THE SIMPLE MAT
FOR NOISE REDUCTION

- quiet, lightweight, for use as heat insulation (not suitable for underfloor heating)

Fits perfectly for laminate flooring:
wineo 300 and all comparable standard laminate and parquet products

noiseREDUCT is the **entry level underlay for laminate and parquet flooring**. This underlay is suitable **for heat insulation (not for underfloor heating)**, is easy to handle and has good impact and reflected walking sound reducing characteristics.

Technical characteristics	
Material:	Polystyrol (XPS)
Rolls / carton:	24
Roll:	16.5 m²
Thickness:	2 mm
Width:	1.1 m
Length:	15 m
Weight:	0.09 kg / m²
Impact sound reduction:	~ 20 dB
Reflected walking sound:	14 %
Thermal resistance:	0.075 (m²K) / W

noiseREDUCT SD | Art. no. UXPS100SD

With integrated **VAPOUR BARRIER**

THE SIMPLE MAT
FOR NOISE REDUCTION

- quiet, lightweight, for use as heat insulation (not suitable for underfloor heating)
- suitable for mineral subsurfaces (such as screed) thanks to integrated vapour barrier

Fits perfectly for laminate flooring:
wineo 300 and all comparable standard laminate and parquet products

noiseREDUCT SD is the **entry level underlay for laminate and parquet flooring with integrated vapour barrier**. This underlay is **suitable for heat insulation (not for underfloor heating)**, is easy to handle and has good impact and reflected walking sound reducing characteristics.

Technical characteristics	
Material:	Polystyrol (XPS)
Rolls / carton:	24
Roll:	16.5 m²
Thickness:	2 mm
Width:	1.1 m
Length:	15 m
Weight:	0.09 kg / m²
Impact sound reduction:	~ 20 dB
Reflected walking sound:	14 %
Thermal resistance:	0.075 (m²K) / W
SD value:	> 75 m

FIBREBOARD
FOR LAMINATE FLOORING

insulationBOARD | Art. no. UHF100

THE STRONG INSULATION BOARD
FOR PROFESSIONALS

- very good heat insulation, height compensation up to approx. 3 mm, high durability

Fits perfectly for laminate flooring:
wineo 300 | 500 | 550 and all comparable standard laminate and parquet products

insulationBOARD has a proven track record with installation professionals as a **heat insulation underlay**. The insulating board has very good compensation characteristics and is very durable.

Technical characteristics	
Material:	Fibreboard
Boxes / pallets:	26
Quantity / box:	7 m² (15 pieces)
Thickness:	5 mm
Width:	0.59 m
Length:	0.79 m
Weight:	1.28 kg / m²
Impact sound reduction:	~ 19 dB
Reflected walking sound:	11 %
Thermal resistance:	0.071 (m²K) / W

PE FILM & MULTI-PURPOSE SEALING TAPE
FOR LAMINATE FLOORING

PE vapour barrier | Art. no. UZUB200

- thin PE film for use under all hard flooring (not required for wood substrates)
- provides a separating layer between screed and underlay materials
- certified to B2

Fits perfectly for:
soundPROTECT, soundPROTECT PROFI, noisePROTECT, noiseREDUCT, insulationBOARD

Technical characteristics	
Rolls / pallets:	100
Roll:	30 m²
Thickness:	0.125 mm
Width:	1 m
Length:	30 m

Multi-purpose sealing tape | Art. no. UZUB100

- special adhesive tape for sealing the edges of underlay
- required for all underlays with integrated vapour barrier

Fits perfectly for:
soundPROTECT SD, soundPROTECT PROFI SD, noisePROTECT SD, noiseREDUCT SD

Technical characteristics	
Roll:	1
Width:	50 mm
Length:	50 m

SKIRTING BOARDS
COMFORT SKIRTING

Contrast | Art. no. F01CT60



60 x 16 x 2380 mm

MDF material | Unit = 4

MATCHED DECOR

Unity



- also available in a decor to match your wineo flooring, see next page

SKIRTING BOARDS
PREMIUM SKIRTING

Classic | Art. no. F01CS80



80 x 18 x 2380 mm

MDF material | Unit = 4

Classic Stainless Steel | Art. no. F02CS80



80 x 18 x 2380 mm |

MDF material | Unit = 4

Design | Art. no. F01DS80



80 x 18 x 2380 mm

MDF material | Unit = 4

Hamburg | Art. no. F01HB80 | Art. no. F01HB100

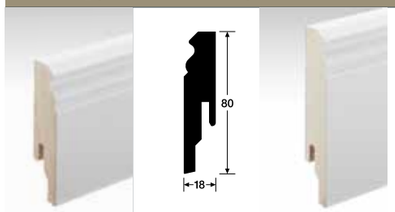



80 x 18 x 2380 mm | 100 x 18 x 2380 mm

MDF material | Unit = 4

Waterproof | Art. no. F01WP60

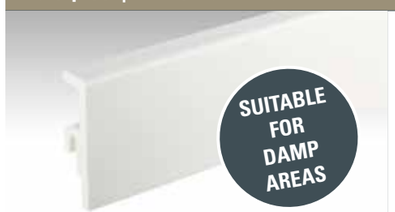

60 x 16 x 2380 mm

ABS-Material | Unit = 4

Aluminium | Art. no. F03ALU6011 | Art. no. F03ALU6013



60 x 11 x 2700 mm | Dryback 2-3 mm | Unit = 10

60 x 13 x 2700 mm | Design-Klick 4-5 mm | Unit = 10

SKIRTING BOARD ACCESSORIES
SKIRTING CLIPS

Skirting clips | Art. no. 30020241

MATCHES PRESENT RANGE

- invisible skirting board fixings
- not for Aluminium skirting

ca. 15 rm | box = 30 clips

Skirting clips NEW | Art. no. FCLIPK

MATCHES THE NEW RANGE

- invisible skirting board fixings
- not for Aluminium skirting

ca. 20 rm | box = 50 clips

INSIDE AND EXTERNAL CORNERS | END CAPS | CONNECTION PIECES

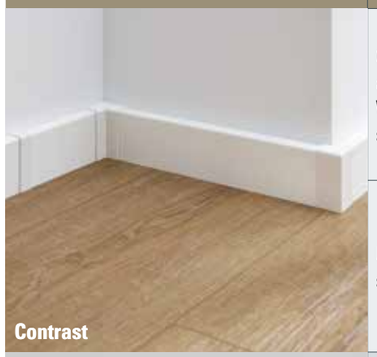

	Fits perfectly for	Type (self-adhesive)	Unit	Colour	Art. no.
	Contrast and **Waterproof skirting board**	Inside corners	4	White	FIE01-60
		External corners	2	White	FAE01-60
		End caps	2	White	FAK01-60
		Connection pieces	2	White	FCP01-60
	Unity skirting board	Inside corners	4	Stainless steel	FIE02-60
		External corners	2	Stainless steel	FAE02-60
		End caps	2	Stainless steel	FAK02-60
		Connection pieces	2	Stainless steel	FCP02-60
	Classic and **Design skirting board**	Inside corners	4	White	FIE01-80
		External corners	2	White	FAE01-80
		End caps	2	White	FAK01-80
		Connection pieces	2	White	FCP01-80
	Classic Stainless Steel skirting board	Inside corners	4	Stainless steel	FIE02-80
		External corners	2	Stainless steel	FAE02-80
		End caps	2	Stainless steel	FAK02-80
		Connection pieces	2	Stainless steel	FCP02-80
	Hamburger 80 skirting board	Inside corners	4	White	FIE01-80H
		External corners	2	White	FAE01-80H
		End caps	2	White	FAK01-80H
		Connection pieces	2	White	FCP01-80H
	Hamburger 100 skirting board	Inside corners	4	White	FIE01-100H
		External corners	2	White	FAE01-100H
		End caps	2	White	FAK01-100H
		Connection pieces	2	White	FCP01-100H

SKIRTING BOARDS
FOR PURLINE ORGANIC FLOORING

wineo 1000

Design	Fits perfectly for (Decor art. no.)	16/60 Art. no.
Arctic Oak	PL008R | PLC008R	F56002UY60
Ascona Pine Nature	PL052R | PLC052R	F58020UY60
Calistoga Cream	PL054R | PLC054R | MLP054R	F54041UY60
Calistoga Grey	PL003R | PLC003R | MLP003R	F58010UY60
Calistoga Nature	PL001R | PLC001R | MLP001R	F54033UY60
Canyon Oak	PL007R | PLC007R | MLP007R	F54029UY60
Carmel Pine	PL048R | PLC048R	F54039UY60
Dacota Oak	PL017R | PLC017R | MLP017R	F74003UY60
Garden Oak	PL005R | PLC005R | MLP005R	F34022UY60
Island Oak Honey	PL043R | PLC043R	F58016UY60
Island Oak Moon	PL045R | PLC045R | MLP045R	F56003UY60
Island Oak Sand	PL044R | PLC044R | MLP044R	F58003UY60
Malmoe Pine	PL019R | PLC019R	F34020UY60
Manhattan Factory	PL058R | PLC058R	F01CT60 (weiß)
Milan Opera	PL059R | PLC059R	F01CT60 (weiß)
Mocca Cream	PL039R | PLC039R	F01CT60 (weiß)
Nordic Pine Modern	PL050R | PLC050R	F58019UY60
Nordic Pine Style	PL049R | PLC049R	F11005UY60
Paris Art	PL057R | PLC057R	F01CT60 (weiß)
Patina Teak	PL046R | PLC046R	F58013UY60
Puro Silver	PL028R | PLC028R	F01CT60 (weiß)
Scivaro Slate	PL038R | PLC038R	F01CT60 (weiß)
Stockholm Loft	PL055R | PLC055R	F01CT60 (weiß)
Summer Beech	PL047R | PLC047R	F54002UY60
Traditional Oak Brown	PL051R | PLC051R | MLP051R	F34003UY60
Valley Oak Mud	PL042R | PLC042R	F58023UY60
Valley Oak Soil	PL041R | PLC041R | MLP041R	F58012UY60
Venice Harbour	PL056R | PLC056R	F01CT60 (weiß)

SKIRTING BOARDS
FOR PURLINE ORGANIC FLOORING

wineo 1200

Design	Fits perfectly for (Decor art. no.)	16/60 Art. no.
Hello Martha	PL076R | PLC076R | MLP076R	F54029UY60
Smile for Emma	PL084R | PLC084R | MLP084R	F78003UY60
Call me Tilda	PL086R | PLC086R | MLP086R	F74004UY60
Cheer for Lisa	PL097R | PLC097R | MLP097R	F58022UY60
Welcome Oskar	PL269R | PLC269R | MLP269R	F54047UY60
Let's go Max	PL270R | PLC270R | MLP270R	F54055UY60
Announcing Fritz	PL271R | PLC271R | MLP271R	F54010UY60
Say hi to Klara	PL272R | PLC272R | MLP272R	F54056UY60

SKIRTING BOARDS
FOR PURLINE ORGANIC FLOORING

wineo 1500 wood XS | wood L | wood XL

Design		Fits perfectly for (Decor art. no.)	16/60 Art. no.
Canyon Oak Honey		PL076C	F54029UY60
Canyon Oak Sand		PL075C	F34009UY60
Classic Oak Autumn		PL073C	F74007UY60
Classic Oak Spring		PL071C	F34011UY60
Classic Oak Summer		PL072C	F54044UY60
Classic Oak Winter		PL074C	F76003UY60
Crafted Oak		PL080C	F54008UY60
Crystal Pine		PL098C	F11007UY60
Fashion Oak Cream		PL092C	F34012UY60
Fashion Oak Grey		PL093C	F36012UY60
Fashion Oak Natural		PL091C	F34016UY60
Garden Oak		PL005C	F34022UY60
Golden Pine Mixed		PL077C	F01CT60 (weiß)
Island Oak Moon		PL045C	F56003UY60
Native Ash		PL099C	F34025UY60
Noble Elm		PL081C	F74006UY60
Polar Pine		PL082C	F56009UY60
Pure Black		PL194C	F99999UY60
Pure Pine		PL079C	F11003UY60
Pure White		PL025C	F01CT60 (weiß)
Queen's Oak Amber		PL096C	F34003UY60
Queen's Oak Pearl		PL097C	F58008UY60
Royal Chestnut Desert		PL085C	F54019UY60
Royal Chestnut Grey		PL084C	F78003UY60
Royal Chestnut Mocca		PL086C	F74004UY60
Silver Pine Mixed		PL078C	F01CT60 (weiß)
Supreme Oak Grey		PL070C	F76002UY60
Supreme Oak Natural		PL068C	F34006UY60
Supreme Oak Silver		PL069C	F56007UY60
Uptown Pine		PL083C	F34023UY60
Village Oak Brown		PL088C	F74016UY60

SKIRTING BOARDS
FOR PURLINE ORGANIC FLOORING

wineo 1500 wood XS | wood L | wood XL

Design		Fits perfectly for (Decor art. no.)	16/60 Art. no.
Village Oak Cream		PL087C	F34024UY60
Village Oak Grey		PL089C	F56010UY60
Western Oak Cream		PL094C	F58016UY60
Western Oak Desert		PL095C	F54005UY60
Wild Wood		PL100C	F34026UY60

SKIRTING BOARDS
FOR DESIGN FLOORING

wineo 400

Design	Fits perfectly for (Decor art. no.)	16/60 Art. no.
Adventure Oak Rustic	DB00111 | DLC00111 | MLD00111	F54020UY60
Ambition Oak Calm	DB00122 | DLC00122 | MLD00122	F36009UY60
Comfort Oak Mellow	DB00129 | DLC00129 | MLD00129	F54012UY60
Compassion Oak Tender	DB00109 | DLC00109 | MLD00109	F54047UY60
Courage Stone Grey	DB00137 | DLC00137 | MLD00137	F56015UY60
Desire Oak Light	DB00108 | DLC00108 | MLD00108	F58009UY60
Dream Pine Light	DB00105 | DLC00105 | MLD00105	F01CT60 (weiß)
Embrace Oak Grey	DB00110 | DLC00110 | MLD00110	F74005UY60
Emotion Oak Rustic	DB00123 | DLC00123 | MLD00123	F36010UY60
Energy Oak Warm	DB00114 | DLC00114 | MLD00114	F54036UY60
Eternity Oak Brown	DB00120 | DLC00120 | MLD00120	F54048UY60
Eternity Oak Grey	DB00121 | DLC00121 | MLD00121	F36011UY60
Fairytale Stone Pale	DB00142| DLC00142 | MLD00142	F56016UY60
Fortune Stone Rusty	DB00143| DLC00143 | MLD00143	F74017UY60
Glamour Concrete Modern	DB00141 | DLC00141 | MLD00141	F76006UY60
Grace Oak Smooth	DB00106 | DLC00106 | MLD00106	F58002UY60
Harmony Stone Sandy	DB00134 | DLC00134 | MLD00134	F34030UY60
Hero Stone Gloomy	DB00138 | DLC00138 | MLD00138	F76005UY60
Inspiration Oak Clear	DB00113 | DLC00113 | MLD00113	F34027UY60
Intuition Oak Brown	DB00130 | DLC00130 | MLD00130	F54044UY60
Joy Oak Tender	DB00126 | DLC00126 | MLD00126	F54016UY60
Kindness Oak Pure	DB00125 | DLC00125 | MLD00125	F34010UY60
Liberation Oak Timeless	DB00128 |DLC00128 | MLD00128	F54007UY60
Luck Oak Sandy	DB00127 | DLC00127 | MLD00127	F34010UY60
Magic Stone Cloudy	DB00136 | DLC00136 | MLD00136	F34031UY60
Memory Oak Silver	DB00132 | DLC00132 | MLD00132	F58007UY60
Miracle Oak Dry	DB00117 | DLC00117 | MLD00117	F76002UY60
Moonlight Pine Pale	DB00104 | DLC00104 | MLD00104	F36008UY60
Paradise Oak Essential	DB00112 | DLC00112 | MLD00112	F58018UY60
Patience Concrete Pure	DB00139 | DLC00139 | MLD00139	F38005UY60
Romance Oak Brilliant	DB00119 | DLC00119 | MLD00119	F54006UY60

SKIRTING BOARDS
FOR DESIGN FLOORING

wineo 400

Design	Fits perfectly for (Decor art. no.)	16/60 Art. no.
Silence Oak Beige	DB00124 | DLC00124 | MLD00124	F34008UY60
Soul Apple Mellow	DB00107 | DLC00107 | MLD00107	F54046UY60
Spirit Oak Silver	DB00115 | DLC00115 | MLD00115	F58013UY60
Starlight Oak Soft	DB00116 | DLC00116 | MLD00116	F56011UY60
Summer Oak Golden	DB00118 | DLC00118 | MLD00118	F54024UY60
Valour Oak Smokey	DB00133 | DLC00133 | MLD00133	F78004UY60
Vision Concrete Chill	DB00135 | DLC00135 | MLD00135	F58024UY60
Wisdom Concrete Dusky	DB00140 | DLC00140 | MLD00140	F36013UY60
Wish Oak Smooth	DB00131 | DLC00131 | MLD00131	F58027UY60

SKIRTING BOARDS
FOR DESIGN FLOORING

wineo 600

Design	Fits perfectly for (Decor art. no.)	16/60 Art. no.
#AmsterdamLoft	DB195W6 | RLC195W6	F54020UY60
#BarcelonaLoft	DB191W6 | RLC191W6	F54060UY60
#BerlinLoft	DB200W6 | RLC200W6	F76004UY60
#BrooklynFactory	DB206W6 | RLC206W6	F78006UY60
#CamdenFactory	DB202W6 | RLC202W6	F56022UY60
#ChelseaFactory	DB203W6 | RLC203W6	F56023UY60
#CopenhagenLoft	DB189W6 | RLC189W6	F34006UY60
#CozyPlace	DB186W6 | RLC186W6	F74021UY60
#ElegantPlace	DB187W6 | RLC187W6	F56003UY60
#LisbonLoft	DB192W6 | RLC192W6	F54016UY60
#LondonLoft	DB193W6 | RLC193W6	F54029UY60
#MilanoLoft	DB190W6 | RLC190W6	F34010UY60
#ModernPlace	DB188W6 | RLC188W6	F78007UY60
#MoscowLoft	DB198W6 | RLC198W6	F54059UY60
#NaturalPlace	DB183W6 | RLC183W6	F34011UY60
#NewtownFactory	DB204W6 | RLC204W6	F56024UY60
#NewYorkLoft	DB197W6 | RLC197W6	F54061UY60
#NoordFactory	DB201W6 | RLC201W6	F11010UY60
#ParisLoft	DB199W6 | RLC199W6	F58007UY60
#SmoothPlace	DB185W6 | RLC185W6	F58005UY60
#SoHoFactory	DB205W6 | RLC205W6	F56025UY60
#SydneyLoft	DB194W6 | RLC194W6	F54062UY60
#ViennaLoft	DB196W6 | RLC196W6	F54012UY60
#WarmPlace	DB184W6 | RLC184W6	F54008UY60

SKIRTING BOARDS
FOR DESIGN FLOORING

wineo 800 wood | wood XL

Design	Fits perfectly for (Decor art. no.)	16/60 Art. no.
Balearic Wild Oak	DB00078 | DLC00078	F58021UY60
Clay Calm Oak	DB00062 | DLC00062	F58005UY60
Copenhagen Frosted Pine	DB00076 | DLC00076	F38003UY60
Corn Rustic Oak	DB00064 | DLC00064	F54031UY60
Crete Vibrant Oak	DB00075 | DLC00075	F74009UY60
Cyprus Dark Oak	DB00066 | DLC00066	F74014UY60
Gothenburg Calm Oak	DB00077 | DLC00077	F58009UY60
Helsinki Rustic Oak	DB00068 | DLC00068	F36007UY60
Honey Warm Maple	DB00081 | DLC00081	F54045UY60
Infinity Dark Solid	DB00073	F58017UY60
Infinity Light Solid	DB00074	F34007UY60
Lund Dusty Oak	DB00065 | DLC00065	F58007UY60
Mud Rustic Oak	DB00063 | DLC00063	F54043UY60
Ponza Smoky Oak	DB00067 | DLC00067	F76004UY60
Riga Vibrant Pine	DB00082 | DLC00082	F56008UY60
Salt Lake Oak	DB00079 | DLC00079	F34007UY60
Santorini Deep Oak	DB00061 | DLC00061	F74002UY60
Sardinia Wild Walnut	DB00083 | DLC00083	F74008UY60
Sicily Dark Oak	DB00069 | DLC00069	F78005UY60
Wheat Golden Oak	DB00080 | DLC00080	F54050UY60

SKIRTING BOARDS
FOR LAMINATE FLOORING

ROCK'N'GO

Design	Fits perfectly for (Decor art. no.)	16/60 Art. no.
Born to be wild	LA151SYS	F01CT60 (weiß)
Dancing in the Dark	LA149SYSV4	F99999UY60
Here comes the sun	LA145SYSV4	F54049UY60
Hotel California	LA144SYSV4	F34005UY60
House of the rising sun	LA143SYSV4	F34028UY60
I was made for loving you	LA147SYSV4	F56013UY60
Knocking on heavens door	LA148SYSV4	F01CT60 (weiß)
London Calling	LA150SYSV4	F58022UY60
Man on the Moon	LA142SYSV4	F36011UY60
Paint it Black	LA153SYS	F99999UY60
Under Pressure	LA152SYS	F01CT60 (weiß)
Whiskey in the Jar	LA146SYSV4	F54030UY60

SKIRTING BOARDS
FOR LAMINATE FLOORING

wineo 300

Design	Fits perfectly for (Decor art. no.)	16/60 Art. no.
Ascona Pine Grey	LA018N(C)	F58014UY60
California Oak	LA144N(C)	F34005UY60
Canadian Maple	LA001N(C)	F34005UY60
Classic Beech	LA004N(C)	F54002UY60
Classic Oak	LA010N(C)	F54008UY60
London Oak	LA150N(C)	F58022UY60
Moon Oak	LA142N(C)	F36011UY60
Natural Walnut	LA012N(C)	F74010UY60
Sun Oak	LA145N(C)	F54049UY60
Traditional Oak Brown	LA024N(C)	F34003UY60
Welsh Dark Oak	LA009N(C)	F58010UY60
Welsh Pale Oak	LA008N(C)	F54013UY60

SKIRTING BOARDS
FOR LAMINATE FLOORING

wineo 500

Design	Fits perfectly for (Decor art. no.)	16/60 Art. no.
Balanced Oak Beige	LA180MV4 | LA180LV4 | LA180XXLV4	F34011UY60
Balanced Oak Brown	LA181MV4 | LA181LV4 | LA181XXLV4	F54055UY60
Balanced Oak Darkbrown	LA182MV4 | LA182LV4 | LA182XXLV4	F54056UY60
Balanced Oak Grey	LA183MV4 | LA183LV4 | LA183XXLV4	F56018UY60
Balanced Oak White	LA179MV4 | LA179LV4 | LA179XXLV4	F34006UY60
Flowered Oak Beige	LA170MV4 | LA170LV4 | LA170XXLV4	F34011UY60
Flowered Oak Brown	LA171MV4 | LA171LV4 | LA171XXLV4	F34012UY60
Flowered Oak Darkbrown	LA172MV4 | LA172LV4 | LA172XXLV4	F54044UY60
Flowered Oak Grey	LA173MV4 | LA173LV4 | LA173XXLV4	F36014UY60
Flowered Oak White	LA169MV4 | LA169LV4 | LA169XXLV4	F11008UY60
Smooth Oak Beige	LA165MV4 | LA165LV4 | LA165XXLV4	F54047UY60
Smooth Oak Brown	LA166MV4 | LA166LV4 | LA166XXLV4	F54029UY60
Smooth Oak Darkbrown	LA167MV4 | LA167LV4 | LA167XXLV4	F74020UY60
Smooth Oak Grey	LA168MV4 | LA168LV4 | LA168XXLV4	F56003UY60
Smooth Oak White	LA164MV4 | LA164LV4 | LA164XXLV4	F11009UY60
Strong Oak Beige	LA175MV4 | LA175LV4 | LA175XXLV4	F34011UY60
Strong Oak Brown	LA176MV4 | LA176LV4 | LA176XXLV4	F54058UY60
Strong Oak Darkbrown	LA177MV4 | LA177LV4 | LA177XXLV4	F54044UY60
Strong Oak Grey	LA178MV4 | LA178LV4 | LA178XXLV4	F56003UY60
Strong Oak White	LA174MV4 | LA174LV4 | LA174XXLV4	F34006UY60
Wild Oak Beige	LA185MV4 | LA185LV4 | LA185XXLV4	F34011UY60
Wild Oak Brown	LA186MV4 | LA186LV4 | LA186XXLV4	F54016UY60
Wild Oak Darkbrown	LA187MV4 | LA187LV4 | LA187XXLV4	F54057UY60
Wild Oak Grey	LA188MV4 | LA188LV4 | LA188XXLV4	F56019UY60
Wild Oak White	LA184MV4 | LA184LV4 | LA184XXLV4	F38006UY60

PREMIUM PROFILES
TRANSITION PROFILES & ADJUSTMENT PROFILES

TRANSITION PROFILES

Application	Fits perfectly for	Product type	Fixing	Colour	Length (mm)	Width (mm)	Art. no.	Packers (up to 18 mm)
	Hard flooring / multilayers (6 - 13 mm)	Transition profile		Silver	1000	36	PPHA1Silb	PPEBlocSilb
				Silver	2700	36	PPHA27Silb	PPEBlocSilb
				Stainless steel	1000	36	PPHA1Edel	PPEBlocEdelMe
				Stainless steel	2700	36	PPHA27Edel	PPEBlocEdelMe
				Brass	1000	36	PPHA1Mess	PPEBlocEdelMe
				Brass	2700	36	PPHA27Mess	PPEBlocEdelMe
Doorways / thresholds same flooring height	Elastic flooring for clicking in (3.5 - 8.5 mm)	Transition profile		Silver	1000	27	PPEA1Silb	
				Silver	2700	27	PPEA27Silb	
				Stainless steel	1000	27	PPEA1Edel	
				Stainless steel	2700	27	PPE27Edel	
				Brass	1000	27	PPEA1Mess	
				Brass	2700	27	PPEA27Mess	
	Elastic flooring for gluing (3 mm)	Expansion joint		Silver	2500	10	PPDD25Silb	

ADJUSTMENT PROFILES

Application	Fits perfectly for	Product type	Fixing	Colour	Length (mm)	Width (mm)	Art. no.	Packers (up to 18 mm)
	Hard flooring / multilayers (6 - 13 mm)	Adjustment profile		Silver	1000	44	PPHB1Silb	PPEBlocSilb
				Silver	2700	44	PPHB27Silb	PPEBlocSilb
				Stainless steel	1000	44	PPHB1Edel	PPEBlocEdelMe
				Stainless steel	2700	44	PPHB27Edel	PPEBlocEdelMe
				Brass	1000	44	PPHB1Mess	PPEBlocEdelMe
				Brass	2700	44	PPHB27Mess	PPEBlocEdelMe
Doorways / thresholds different flooring heights	Elastic for clicking in (3.5 - 8.5 mm)	Adjustment profile		Silver	1000	34	PPEB1Silb	
				Silver	2700	34	PPEB27Silb	
				Stainless steel	1000	34	PPEB1Edel	
				Stainless steel	2700	34	PPEB27Edel	
				Brass	1000	34	PPEB1Mess	
				Brass	2700	34	PPEB27Mess	

Minimum order quantity = 1

PREMIUM PROFILES
END PROFILE

END PROFILES

Application	Fits perfectly for	Product type	Fixing	Colour	Length (mm)	Width (mm)	Art. no.	Packers (up to 18 mm)
	Hard flooring / multilayers (6 - 13 mm)	End strip		Silver	1000	25	PPHC1Silb	PPEBlocSilb
				Silver	2700	25	PPHC27Silb	PPEBlocSilb
				Stainless steel	1000	25	PPHC1Edel	PPEBlocEdelMe
				Stainless steel	2700	25	PPHC27Edel	PPEBlocEdelMe
				Brass	1000	25	PPHC1Mess	PPEBlocEdelMe
				Brass	2700	25	PPHC27Mess	PPEBlocEdelMe
Flooring depth windows	Elastic flooring for clicking in (3.5 - 8.5 mm)	End strip		Silver	1000	23	PPEC1Silb	
				Silver	2700	23	PPEC27Silb	
				Stainless steel	1000	23	PPEC1Edel	
				Stainless steel	2700	23	PPEC27Edel	
				Brass	1000	23	PPEC1Mess	
				Brass	2700	23	PPEC27Mess	
	Elastic flooring for gluing (3 mm)	L-shaped end strip		Silver	2500	23	PPDL25Silb	

Minimum order quantity = 1

COMFORT PROFILES

TRANSITION PROFILE SELF ADHESIVE | STAIR NOSING & ANGLED PROFILES

TRANSITION PROFILE SELF-ADHESIVE

Application	Fits perfectly for	Product type	Fixing	Colour	Length (mm)	Width (mm)	Art. no.
	Hard flooring / multilayers (6 - 13 mm)	Transition profile (smooth)		Silver	1000	30	PCHA1Silb
				Silver	2700	30	PCHA27Silb
				Stainless steel	1000	30	PCHA1Edel
				Stainless steel	2700	30	PCHA27Edel
				Brass	1000	30	PCHA1Mess
				Brass	2700	30	PCHA27Mess
Doorways / thresholds same flooring height	Elastic flooring for clicking in or gluing (0 - 10 mm)	Transition profile (fluted)		Silver	1000	25	PCEA1Silb
				Silver	2700	25	PCEA27Silb
				Stainless steel	1000	25	PCEA1Edel
				Stainless steel	2700	25	PCEA27Edel
				Brass	1000	25	PCEA1Mess
				Brass	2700	25	PCEA27Mess

STAIR NOSING PROFILE & ANGLED PROFILE

Application	Fits perfectly for	Product type	Fixing	Colour	Length (mm)	Width (mm)	Art. no.
Stair end piece	Hard flooring / multilayers (7 - 15 mm)	Stair nosing profile		Silver	2500	30 x 25	PPHT25Silb
	Elastic flooring for clicking in (6 - 6,5 mm)			Silver	2500	43,5	PPET25Silb
	Elastic flooring for gluing (2,5 mm)			Silver	2500	39,5	PPDT25Silb
Plinths / shelves	Hard flooring / multilayers	Angled profile		Silver	2700	15 x 8,5	PCW27Silb1
	Elastic flooring for clicking in			Silver	2700	24,5 x 15	PCW27Silb2
	Elastic flooring for gluing						

Minimum order quantity = 1

STAIR NOSING
TYPE A FOR WINEO 400 AND WINEO 1000

Stair nose A has a single return, cannot be clicked on the leading edge, and forms a closed, straight end piece.

- non-slip thanks to R9 surface, durable, easy to clean

Ordering:
- When ordering, please provide the article number of the stair type and the decor code for the flooring.
- Delivery is approximately 2 weeks.

Technical characteristics

wineo 400 wood | Click			**wineo 400** wood XL | Click			**wineo 400** stone | Click		
Art. no.:	20080852		Art. no.:	0080855		Art. no.:	20080858	
Thickness:	4.5 mm		Thickness:	4.5 mm		Thickness:	4.5 mm	
Length:	1212 mm		Length:	1507 mm		Length:	1200 mm	
Width:	TYPE A	ca. 144 mm*	Width:	TYPE A	ca. 192 mm*	Width:	TYPE A	ca. 273 mm*
	TYPE B	ca. 150 mm*		TYPE B	ca. 198 mm*		TYPE B	ca. 279 mm*
	TYPE C	ca. 123 mm**		TYPE C	ca. 171 mm**		TYPE C	ca. 252 mm**
wineo 400 wood | Multi-Layer			**wineo 400** wood XL | Multi-Layer			**wineo 400** stone | Multi-Layer		
Art. no.:	20080861		Art. no.:	20080864		Art. no.:	20080867	
Thickness:	9 mm		Thickness:	9 mm		Thickness:	9 mm	
Length:	1222 mm		Length:	1520 mm		Length:	1202 mm	
Width:	TYPE A	ca. 139 mm*	Width:	TYPE A	ca. 187 mm*	Width:	TYPE A	ca. 267 mm*
	TYPE B	ca. 145 mm*		TYPE B	ca. 193 mm*		TYPE B	ca. 273 mm*
	TYPE C	ca. 118 mm**		TYPE C	ca. 166 mm**		TYPE C	ca. 246 mm**
wineo 1000 wood | Click			**wineo 1000** wood XXL | Multi-Layer			**wineo 1000** stone | Click		
Art. no.:	20080873		Art. no.:	20080870		Art. no.:	20080876	
Thickness:	5 mm		Thickness:	9 mm		Thickness:	5 mm	
Length:	1295 mm		Length:	1845 mm		Length:	859 mm	
Width:	TYPE A	ca. 152 mm*	Width:	TYPE A	ca. 194 mm*	Width:	TYPE A	ca. 354 mm*
	TYPE B	ca. 155 mm*		TYPE B	ca. 200 mm*		TYPE B	ca. 360 mm*
	TYPE C	ca. 132 mm**		TYPE C	ca. 174 mm**		TYPE C	ca. 333 mm**

*Tolerance: +/- 1.5 mm | **Tolerance: +/- 3 mm

STAIR NOSING
TYPE B FOR WINEO 400 AND WINEO 1000

Stair nose B has a single return and can be clicked on both the leading and rear edges.
This allows continuous installation on block stairs.

- non-slip thanks to R9 surface, durable, easy to clean

Ordering:
- When ordering, please provide the article number of the stair type and the decor code for the flooring.
- Delivery is approximately 2 weeks.

Technical characteristics

wineo 400 wood | Click			**wineo 400** wood XL | Click			**wineo 400** stone | Click		
Art. no.:	20080853		Art. no.:	20080856		Art. no.:	20080859	
Thickness:	4.5 mm		Thickness:	4.5 mm		Thickness:	4.5 mm	
Length:	1212 mm		Length:	1507 mm		Length:	1200 mm	
Width:	TYPE A	ca. 144 mm*	Width:	TYPE A	ca. 192 mm*	Width:	TYPE A	ca. 273 mm*
	TYPE B	ca. 150 mm*		TYPE B	ca. 198 mm*		TYPE B	ca. 279 mm*
	TYPE C	ca. 123 mm**		TYPE C	ca. 171 mm**		TYPE C	ca. 252 mm**
wineo 400 wood | Multi-Layer			**wineo 400** wood XL | Multi-Layer			**wineo 400** stone | Multi-Layer		
Art. no.:	20080862		Art. no.:	20080865		Art. no.:	20080868	
Thickness:	9 mm		Thickness:	9 mm		Thickness:	9 mm	
Length:	1222 mm		Length:	1520 mm		Length:	1202 mm	
Width:	TYPE A	ca. 139 mm*	Width:	TYPE A	ca. 187 mm*	Width:	TYPE A	ca. 267 mm*
	TYPE B	ca. 145 mm*		TYPE B	ca. 193 mm*		TYPE B	ca. 273 mm*
	TYPE C	ca. 118 mm**		TYPE C	ca. 166 mm**		TYPE C	ca. 246 mm**
wineo 1000 wood | Click			**wineo 1000** wood XXL | Multi-Layer			**wineo 1000** stone | Click		
Art. no.:	20080874		Art. no.:	20080871		Art. no.:	20080877	
Thickness:	5 mm		Thickness:	9 mm		Thickness:	5 mm	
Length:	1295 mm		Length:	1845 mm		Length:	859 mm	
Width:	TYPE A	ca. 152 mm*	Width:	TYPE A	ca. 194 mm*	Width:	TYPE A	ca. 354 mm*
	TYPE B	ca. 155 mm*		TYPE B	ca. 200 mm*		TYPE B	ca. 360 mm*
	TYPE C	ca. 132 mm**		TYPE C	ca. 174 mm**		TYPE C	ca. 333 mm**

*Tolerance: +/- 1.5 mm | **Tolerance: +/- 3 mm

STAIR NOSING
TYPE C FOR WINEO 400 AND WINEO 1000 UP TO 5 MM THICKNESS

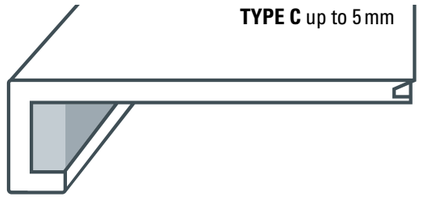

Stair nose C has a double return and is suitable for underlays up to 5 mm.
This variant cannot be clicked on the leading edge, forming a closed, straight end piece.

- non-slip thanks to R9 surface, durable, easy to clean

Ordering:
- When ordering, please provide the article number of the stair type and the decor code for the flooring.
- Delivery is approximately 2 weeks.

Technical characteristics

wineo 400 wood | Click			**wineo 400** wood XL | Click			**wineo 400** stone | Click		
Art. no.:	20080854		Art. no.:	20080857		Art. no.:	20080860	
Thickness:	4.5 mm		Thickness:	4.5 mm		Thickness:	4.5 mm	
Length:	1212 mm		Length:	1507 mm		Length:	1200 mm	
Width:	TYPE A	ca. 144 mm*	Width:	TYPE A	ca. 192 mm*	Width:	TYPE A	ca. 273 mm*
	TYPE B	ca. 150 mm*		TYPE B	ca. 198 mm*		TYPE B	ca. 279 mm*
	TYPE C	ca. 123 mm**		TYPE C	ca. 171 mm**		TYPE C	ca. 252 mm**
wineo 1000 wood | Click			**wineo 1000** stone | Click					
Art. no.:	20080875		Art. no.:	20080878				
Thickness:	5 mm		Thickness:	5 mm				
Length:	1295 mm		Length:	859 mm				
Width:	TYPE A	ca. 152 mm*	Width:	TYPE A	ca. 354 mm*			
	TYPE B	ca. 155 mm*		TYPE B	ca. 360 mm*			
	TYPE C	ca. 132 mm**		TYPE C	ca. 333 mm**			

*Tolerance: +/- 1.5 mm | **Tolerance: +/- 3 mm

STAIR NOSING
TYPE C FOR WINEO 400 AND WINEO 1000 UP TO 9 MM THICKNESS

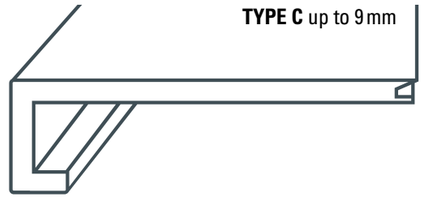

Stair nose C has a double return and is suitable for underlays up to 9 mm.
This variant cannot be clicked on the leading edge, forming a closed, straight end piece.

- non-slip thanks to R9 surface, durable, easy to clean

Ordering:
- When ordering, please provide the article number of the stair type and the decor code for the flooring.
- Delivery is approximately 2 weeks.

Technical characteristics

wineo 400 wood | Multi-Layer			**wineo 400** wood XL | Multi-Layer			**wineo 400** stone | Multi-Layer		
Art. no.:	20080863		Art. no.:	20080866		Art. no.:	20080869	
Thickness:	9 mm		Thickness:	9 mm		Thickness:	9 mm	
Length:	1222 mm		Length:	1520 mm		Length:	1202 mm	
Width:	TYPE A	ca. 139 mm*	Width:	TYPE A	ca. 187 mm*	Width:	TYPE A	ca. 267 mm*
	TYPE B	ca. 145 mm*		TYPE B	ca. 193 mm*		TYPE B	ca. 273 mm*
	TYPE C	ca. 118 mm**		TYPE C	ca. 166 mm**		TYPE C	ca. 246 mm**
wineo 1000 wood XXL | Multi-Layer								
Art. no.:	20080872							
Thickness:	9 mm							
Length:	1845 mm							
Width:	TYPE A	ca. 194 mm*						
	TYPE B	ca. 200 mm*						
	TYPE C	ca. 174 mm**						

IMPORTANT!
The **width** refers to the visible decor width (height = 40 mm, bottom edge = 20 mm).
For the respective internal dimensions subtract the material thickness.

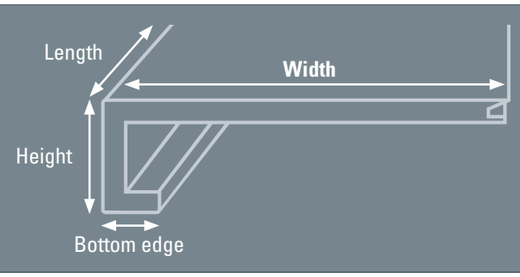

*Tolerance: +/- 1.5 mm | **Tolerance: +/- 3 mm

SKIRTING BOARDS | EXTERNAL CORNERS | INSIDE CORNERS | WELD RODS

- available for all wineo 1500 roll designs
- uniform rounding due to machine-finished reinforcement
- very robust – no additional supporting profile
- high stability in corner area, no maintenance joint
- elastic material compensates screed sink
- practical skirting dimensions from 2.40 m long – no customising of strips
- flush thresholds guaranteed
- materials do not need to be heated during installation
- also available as acoustic variant for PURLINE flooring with integrated underlay
- no additional templates required
- order-specific scope of delivery

Technical characteristics	Skirting boards	External corners	Inside corners	Welding rods
Height	100 mm	100 mm	100 mm	4 mm
Width	100 mm	100 mm	100 mm	4 mm
Length	2400 mm	230 mm je Seite	210 mm je Seite	60 m / Roll

Design	Fits perfectly for	Skirting board	External corner	Inside corner	Welding rods
Apple Green	PLR185C	PH185	PEA185	PEI185	PS185
Apple Green Acoustic	PLR185CACT	PH185ACT	PEA185ACT	PEI185ACT	PS185
Bright.One	PLR115C	PH115	PEA115	PEI115	PS115
Bright.Two	PLR116C	PH116	PEA116	PEI116	PS116
Bright.Three	PLR117C	PH117	PEA117	PEI117	PS117
Bright.Four	PLR118C	PH118	PEA118	PEI118	PS118
Cappuccino	PLR004C	PH004	PEA004	PEI004	PS004
Cool.One	PLR107C	PH107	PEA107	PEI107	PS107
Cool.Two	PLR108C	PH108	PEA108	PEI108	PS108
Cool.Three	PLR109C	PH109	PEA109	PEI109	PS109
Cool.Four	PLR110C	PH110	PEA110	PEI110	PS110
Cottage Oak	PLR038C	PH038	PEA038	PEI038	PS038
Denim Blue Stars	PLR132C	PH132	PEA132	PEI132	PS132
Denim Blue Stars Acoustic	PLR132CACT	PH132ACT	PEA132ACT	PEI132ACT	PS132
Floating Wood Sand	PLR134C	PH134	PEA134	PEI134	PS134
Floating Wood Snow	PLR133C	PH133	PEA133	PEI133	PS133
Halifax Oak	PLR036C	PH036	PEA036	PEI036	PS036
Halifax Oak Acoustic	PLR036CACT	PH036ACT	PEA036ACT	PEI036ACT	PS036
Honey Mustard	PLR128C	PH128	PEA128	PEI128	PS128
Jungle Green	PLR018C	PH018	PEA018	PEI018	PS018
Light Grey	PLR021C	PH021	PEA021	PEI021	PS021

Design	Fits perfectly for	Skirting board	External corner	Inside corner	Welding rods
Light Grey Acoustic	PLR021CACT	PH021ACT	PEA021ACT	PEI021ACT	PS021
Melange	PLR003C	PH003	PEA003	PEI003	PS003
Midnight Grey	PLR024C	PH024	PEA024	PEI024	PS024
Midnight Grey Stars	PLR126C	PH126	PEA126	PEI126	PS126
Midnight Grey Stars Acoustic	PLR126CACT	PH126ACT	PEA126ACT	PEI126ACT	PS126
Missouri Oak	PLR039C	PH039	PEA039	PEI039	PS039
Napa Walnut Brown	PLR136C	PH136	PEA136	PEI136	PS136
Napa Walnut Cream	PLR135C	PH135	PEA135	PEI135	PS135
Navi Blue	PLR129C	PH129	PEA129	PEI129	PS129
Navi Blue Stars	PLR131C	PH131	PEA131	PEI131	PS131
Pacific Oak	PLR037C	PH037	PEA037	PEI037	PS037
Pacific Oak Acoustic	PLR037CACT	PH037ACT	PEA037ACT	PEI037ACT	PS037
Pure Black Stars	PLR127C	PH127	PEA127	PEI127	PS127
Pure White	PLR025C	PH025	PEA025	PEI025	PS025
Pure White Stars	PLR123C	PH123	PEA123	PEI123	PS123
Pure.One	PLR111C	PH111	PEA111	PEI111	PS111
Pure.Two	PLR112C	PH112	PEA112	PEI112	PS112
Pure.Three	PLR113C	PH113	PEA113	PEI113	PS113
Pure.Four	PLR114C	PH114	PEA114	PEI114	PS114
Racing Green	PLR019C	PH019	PEA019	PEI019	PS019
Red Rubin	PLR011C	PH011	PEA011	PEI011	PS011
Silver Grey	PLR022C	PH022	PEA022	PEI022	PS022
Silver Grey Acoustic	PLR022CACT	PH022ACT	PEA022ACT	PEI022ACT	PS022
Silver Grey Stars	PLR124C	PH124	PEA124	PEI124	PS124
Silver Grey Stars Acoustic	PLR124CACT	PH124ACT	PEA124ACT	PEI022ACT	PS124
Sinai Sand	PLR002C	PH002	PEA002	PEI002	PS002
Sinai Sand Acoustic	PLR002C	PH002ACT	PEA002ACT	PEI002ACT	PS002
Sinai Sand Stars	PLR130C	PH130	PEA130	PEI130	PS130
Steel Grey	PLR023C	PH023	PEA023	PEI023	PS023
Summer Sky	PLR014C	PH014	PEA014	PEI014	PS014
Terracotta Dark	PLR009C	PH009	PEA009	PEI009	PS009
Terracotta Dark Acoustic	PLR009CACT	PH009ACT	PEA009ACT	PEI009ACT	PS009
Warm.One	PLR119C	PH119	PEA119	PEI119	PS119
Warm.Two	PLR120C	PH120	PEA120	PEI120	PS120
Warm.Three	PLR121C	PH121	PEA121	PEI121	PS121
Warm.Four	PLR122C	PH122	PEA122	PEI122	PS122

FLASH COVING

The flash coving set makes installing the basin-like skirtings easier. These accessories ensure perfect and accurate external and inside corners.

Flash Coving Set | Art. no. 10040067

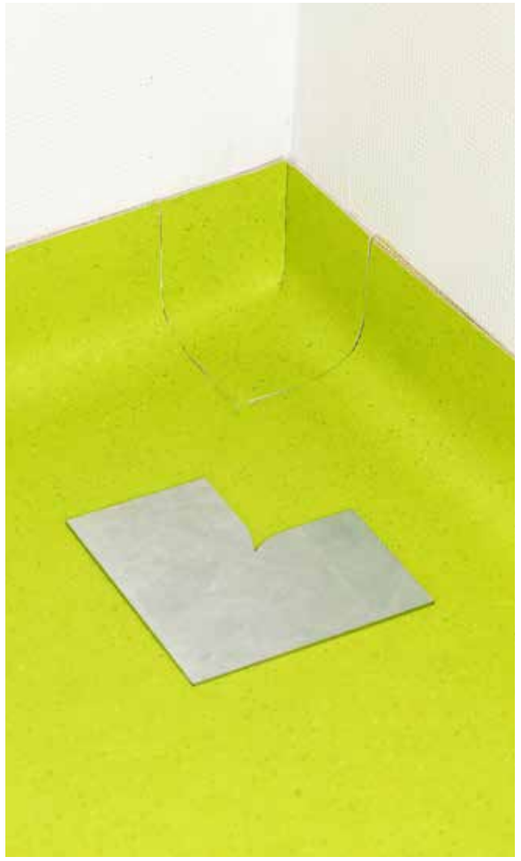

All products from the Flash Coving Set are also available individually:

Flash Coving Tools | Art. no. 10040064

Technical characteristics

Unit: 1 inside corner template,
1 template for relieving material tension

Hollow profile strip for flash coving | Art. no. 20080458

Technical characteristics

Format: B 15 mm x H 15 mm x L 2500 mm

Unit: 20 pieces

Sealant | Art. no. 20080793

Technical characteristics

Content: 300 g (1 cartridge contains approx. 10 rm)

Unit: 1 cartridge

available for all wineo 1500 roll decors

FEATURE STRIPS

When installed between the panels, the feature strips create outstanding effects from an authentic plank or tile look to optically extending the length of the room. Whether in discrete colours or sharp contrast, the feature strips must be glued with all elastic wineo flooring.

Feature strips

Unicoloured-design	2 mm	2.5 mm
Anthracite	AAN20DL	AAN25DL
Cream	ACR20DL	ACR25DL
Dark brown	ADB20DL	ADB25DL
Black	ASW20DL	ASW25DL
Silver grey	ASG20DL	ASG25DL

Technical characteristics	
Width:	5 mm
Thickness:	2 mm or 2.5 mm
Length:	1000 mm
Box:	50 m

INSTALLATION TOOLS | CLEANING AND REPAIR

- LAMINATE FLOORING
- DESIGN FLOORING
- ORGANIC FLOORING

Rubber hammer | Art. no. 20021004

- the essential tool for professionals – the rubber hammer

Blue Marlin knife | Art. no. 20021003

- the professional knife for installing flooring (supplied without blade)

Assembly aid pro | Art. no. 10030652

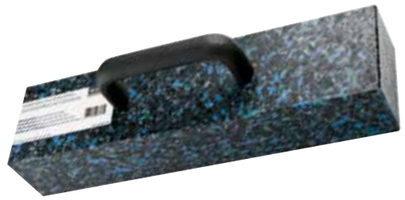

- with practical handle – makes installing click-in flooring easier

Assembly aid | Art. no. 10030657

- solid wood, improves installation of elastic flooring for clicking-in

Round cord | Art. no. 20080300

- approx. 6 mm Ø, 10 m length, insert for expansion joints, for sealing with acrylic paste

Cleaning set | Art. no. 10040065

- contains: flooring wiper, microfibre mop, PU cleaner, spray bottle (empty)

PU cleaner (separate) | Art. no. 10040068

- PU cleaner 750 ml – replacement order for the cleaning set

Micro-fibre mop (separate) | Art. no. 10040066

- replacement micro-fibre mop

Hard wax repair set, colour | Art. no. 10040063

- 20 x 4 cm long hard wax sticks in a range of colours, can be blended

Hard wax repair set, transparent | Art. no. 10040062

- 4 cm long hard and soft wax sticks (3 of each) and 8 cm filler (2 pieces)

Gas soldering iron pro | Art. no. 10040101

- professional gas soldering iron for heating up and working hard wax

Filler plane | Art. no. 10040061

- for planing fillers – matt or polished finish for excess wax

Windmöller GmbH
Nord-West-Ring 21
D-32832 Augustdorf
Tel.: +49 (0) 52 37 609 - 0
Fax: +49 (0) 52 37 609 - 309
info@wineo.de
www.wineo.de

Product no. 20091021 | 02/2021

wineo